




REBLOC 120.3_7.5


Dispositivi non ancorati

REBLOC | 120.3_7.5

Dispositivi non ancorati

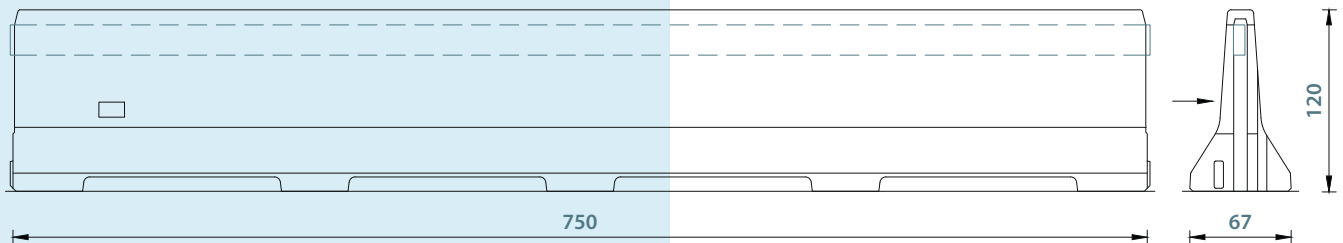

Containment level	H4b
Working width	W6 ($W_N \leq 1.8$ m)
Impact severity level	ASI B
Vehicle intrusion	VI6 ($VI_N \leq 2.1$ m)
Installation	Free standing on asphalt or concrete
Minimum installation length	82 m (11 elements) + initial/end anchorage
Initial/end anchorage	Required (according to anchor chart 39-10501)
Dimensions L x W x H in cm	750 x 67 x 120 cm
Weight/element per m	6.030kg - 804kg/m
Curve radius	$r \geq 250$ m, smaller radii on request

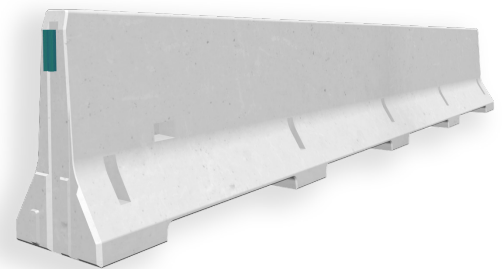

Graz University of Technology, accreditation no: 259
TÜV SÜD LGÖ, NB 0531: assessment report no 725221595_7 RB120.3_7.5



RESISTENTE
AL GELO



RISPETTA
L'AMBIENTE



NESSUN
MATERIALE NOCIVO



CERTIFICATO
CE

PIACENZA (Sede centrale) _ St. di Cortemaggiore 25 / PC
FERRARA _ Via Ferrara 31 / Poggio Renatico / FE
PISTOIA _ Via Nociaccio 10 / Ponte Buggianese / PT

T 0523 599611 F 0523 599625
T 0532 829941 F 0532 824807
T 0572 93251 F 0572 932540

paverpc@paver.it
paverfe@paver.it
paverpt@paver.it

www.paver.it